



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 10 MAR 2005

WIPO

PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (c)

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

IB 2005/50594

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04100754.3

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk





Anmeldung Nr:  
Application no.: 04100754.3  
Demande no:

Anmeldetag:  
Date of filing: 26.02.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method and circuit for encrypting a data stream

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04N9/79

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI



**Method and circuit for encrypting a data stream**

The invention relates to a method of encrypting a data stream comprising at least one stream of audiovisual data.

The invention further relates to a circuit for encrypting a data stream comprising at least one stream of audiovisual data.

5           The invention also relates to a method of decrypting audiovisual data.

The invention further relates to a circuit for decrypting audiovisual data.

Furthermore, the invention relates to a computer programme product comprising computer readable instruction for programming a processing unit

10           The invention also relates to a data carrier carrying such computer programme product.

The invention further relates to a programmed computer.

The invention furthermore relates to a data carrier carrying data encrypted using the method according to the invention.

15

Current legislation requires the possibility of encryption when storing television programmes received by broadcast. Television programmes, in particular digitally broadcast television programmes, can be provided with copy control information as meta data. Options for the copy control information are among others: do not copy (recording not  
20 allowed), copy once (one recording allowed; copying recording not allowed) and copy free (free distribution of the content allowed within the personal environment of the consumer). And even when the copy free information is broadcasted with the television programmes, it may be required to encrypt any stored part of the television programme. This requirement is set in a further broadcast flag.

25

This requires implementation of encryption hardware and/or software in video recorders like DVD recorders. The problem is, however, that the installed base of e.g. DVD players does not support encryption. This can be solved by buying new equipment, but this is expensive. And on legacy equipment, legacy audiovisual material can still be reproduced. Furthermore, not all programmes recorded by video recorders with encryption functionality

encrypt programmes when they record them. Besides that, the new video recorders with encryption functionality will be able to play back encrypted content. Therefore, it is not always directly necessary to discard the legacy DVD players.

However, as content on a DVD may be mixed, i.e. encrypted content is stored next to non-encrypted content, a user may try to playback encrypted content on a non-compliant DVD-player. With respect to reproduction of video data, this will result in not very interesting blocks on the screen. With respect to reproduction of audio data, this will result in noise, ticks et cetera, which can be quite loud. The loud noise may damage equipment (speakers) and/or the ears of a user, especially when he or she wears headphones.

It is an object of the invention to prevent playback such possibly damaging streams on legacy playback devices.

To achieve this object, the invention provides in a first aspect a method of encrypting a data stream comprising at least one stream of audiovisual data, comprising steps of: segmenting the stream of audiovisual data in data segments; providing the data segments with ID data in an ID segment, the ID data being different from ID data being pre-determined to identify the type of data in the stream of audiovisual data; and partly encrypting the data segments, leaving the ID segment unencrypted.

When during encrypting audiovisual data for storage on a DVD for example the ID data of audio data is modified to ID data not compliant with the DVD standard, a legacy DVD-player will not recognise the audio as such and will not reproduce any audio. In this way, a speaker of reproduction equipment will not be damaged.

European patent application with application number 03104402.7 proposes a navigation structure to shield encrypted content from legacy devices through special navigation commands. However, this method relies on the fact that recorders do a perfect job and that players will never find their way around the navigation shield. In practise, this cannot always be guaranteed. For example, some players allow direct playback of a file comprising audiovisual data.

In a further embodiment of the method according to the invention, the data stream comprises multiple streams of different types of audiovisual data and data segments of at least one stream of audiovisual data are encrypted.

The following description is provided in connection with a preferred embodiment of the invention. It should be understood that the invention is not limited to the following description.

example of this is Digital Video Broadcasting with Multimedia Home Platform (interactive) functionality. The different types of data are provided in separated streams, multiplexed or to be multiplexed in on single data stream.

5 In yet a further embodiment of the method according to the invention, data segments of at least one stream of audiovisual data is provided with ID segments comprising ID data being different from ID data being pre-determined to identify the type of data in the stream of audiovisual data.

10 When the data stream comprises multiple stream of audiovisual data (or other types of data) and only prevention of reproduction of one of those streams comprises by the data stream is desired, only the ID data of data packets for that stream has to be changed. In this way, only data of that particular stream will not be reproduced by a legacy device, whereas the data of other stream will be reproduced.

15 In another embodiment of the method according to the invention, the data segments are provided with further ID data in the ID segment, the further ID data being pre-determined to identify the type of data in the stream of audiovisual data and the further ID data being in a further step replaced by the ID data being different from ID data being pre-determined to identify the type of data in the stream of audiovisual data.

20 An advantage of this embodiment is that standard, already existing circuitry can be used that provides the data segments with the pre-determined ID data for identifying that type of data. Of course, this is at the cost of a separate additional circuit for modifying the pre-determined ID data.

25 The invention provides in a second aspect a circuit for encrypting a data stream comprising at least one stream of audiovisual data, comprising: a segmenting unit for segmenting the stream of audiovisual data in data segments; a unit for providing the data segment with ID data in an ID segment, the ID data being different from ID data being pre-determined to identify the type of data in the stream of audiovisual data; and an encryption unit for partly encrypting the data segments, leaving the ID segment unencrypted.

30 The invention provides in a third aspect an apparatus for storing data, comprising: a receiver for receiving data; the circuit according to claim 10; and a storage device for storing the encrypted data on a storage medium.

The invention provides in a fourth aspect a method of decrypting audiovisual data encrypted using to the method as claimed in claim 1, comprising the steps of: decrypting the partly encrypted data segments; recognising that the data carried by the ID segment is different from ID data being pre-determined to identify the type of data in the

stream of audiovisual data and recognising the actual type of data comprised by the data segments; and forming a stream of audiovisual data from the data segments.

The invention provides in a fifth aspect a circuit for decrypting audiovisual data encrypted by the circuit as claimed in claim 10, comprising: a decryption unit for  
5 decrypting the partly encrypted data segments; an identification unit for recognising that the data carried by the ID segment is different from ID data being pre-determined to identify the type of data in the stream of audiovisual data and recognising the actual type of data comprised by the data segments; and a streaming unit for forming a stream of audiovisual data from the data segments.

10 The invention provides in a sixth aspect an apparatus for rendering and retrieving audiovisual data, comprising: a storage device for retrieving data from a storage medium; the circuit according to claim 15; and a circuit for rendering the decrypted stream of audiovisual data.

The invention provides in a seventh aspect a computer programme product  
15 comprising computer readable instruction for programming a processing unit for executing the method according to claim 1.

The invention provides in an eighth aspect a data carrier carrying the computer programme product as claimed in claim 1.

20 The invention provides in a ninth aspect a programmed computer enabled to execute the method according to claim 1.

The invention provides in a tenth aspect a computer programme product comprising computer readable instruction for programming a processing unit for executing the method according to claim 13.

25 The invention provides in an eleventh aspect a data carrier carrying the computer programme product as claimed in claim 13.

The invention provides in a twelfth aspect a programmed computer enabled to execute the method according to claim 13.

The invention provides in a thirteenth aspect a data carrier carrying data encrypted using the method according to claim 1.

30

The invention will be further elucidated by means of FIGs., wherein:

FIG. 1 shows a block diagram of a data carrier according to the invention.

FIG. 2 shows a block diagram of a circuit according to the invention.



Fig. 2 shows a flowchart depicting an embodiment of the method for encrypting a data stream according to the invention;

Fig. 3 shows a data pack produced by the method depicted by the flowchart shown by Fig. 2; and

5 Fig. 4 shows a DVD player as an embodiment of the apparatus for retrieving and rendering data according to the invention.

Fig. 5 shows a flowchart depicting an embodiment of the method for retrieving and rendering data according to the invention;

10

Fig. 1 shows a video recorder 100 as an embodiment of the apparatus according to the invention. The video recorder 100 comprises a receiver 101, a de-multiplexer 102, a video processor 103 as a rendering unit, a coding circuit 110 as an embodiment of the circuit according to the invention, the coding circuit 110 comprising a  
 15 multiplexer 104, an encryption unit 105 and a packet identifier unit 106. The video recorder further comprises a DVD recorder drive 107 as a storage device.

The operation of the video recorder 100 will be described by means of Fig. 1 and a flowchart 200 as depicted in Fig. 2, showing a recording process as an embodiment of the process according to the invention. The processes of the flowchart 200 are labelled as  
 20 indicated in Table 1.

Reference numeral:	Label of process step
202	Start recording procedure, user input
204	Receiving data stream
230	Multiplexing packs
206	Segmenting streams
208	Adding ID data to segments
210	Putting segments in packs
212	Sequencing packs
214	Encrypting packs
216	Alter ID data of basic audio stream segments
218	Store stream
220	End procedure

Table 1

The recording process starts by means of a user input in a process step 200. In a further embodiment, the recording process starts by means of an automatically generated input of a programming unit conceived to programme recordings by the video recorder 100.

Next, a data stream comprising data to record is received by the receiver 101 in a process step 202. The data stream can be received by receiving a signal 150 comprising the data by a wireless connection, a broadcast wired connection like cable, or a (virtual) point to point connection like broadband internet; various embodiments of the receiving process step 202 and the receiver 101 are possible. Having received the signal 150, the data stream is extracted from the signal and provided to the de-multiplexer 102. The extracted data stream is in this embodiment a transport stream comprising audio and video data streams for a television programme. In the further course of this description as well as the claims accompanying this patent application, both types of data will be referred to as audiovisual data, even when there is only audio or video data.

The de-multiplexer 102 separates the various audiovisual data streams comprised by the extracted programme stream to usually an elementary audiostream and an elementary videostream. A preferred format for these elementary streams is the MPEG-2 format. The programme stream may also comprise a stream with data for interactive television applications and a stream with data for enhancing the elementary audiostream and/or the elementary videostream. In Fig. 2, the de-multiplexing process step is comprised by the receiving process step 202.

The elementary audiostream and the elementary videostream are provided to the video processor 103 for rendering the audiovisual data comprised by the elementary streams. For this description, rendering means that the MPEG-2 data (in case of the present embodiment) is decompressed and transformed for reproduction by a speaker 120 and a TV-set (not shown).

Besides rendering, the video recorder 100 is also capable of recording the received data. To this, the data received by the receiver 101 and de-multiplexed by the de-multiplexer 102 (both in the process step 204) is segmented in data segments in a process step 206. The data segments are also known as (data) packets.

Subsequently, ID data is added to the segments in a process step 208 to identify the type of data comprised by the segments. The ID data identifies the type of data comprised by the segments and is pre-defined for facilitates playback of the stored data by a playback device like a DVD Player, a MiniDVD Player, a Blu-ray Player, a TV, a computer, etc.

values of stream IDs as in Table 2 have been agreed. The ID data is comprised by a data segment (or data packet) header.

Table 2 also comprises information on sub stream IDs. Sub streams are comprised by a private stream comprised by the total data stream on a DVD. The sub streams provide further information, complementary to the basic audio and video data. Examples are AC-3, audio, DTS (Digital Theatre System), SDDS (Sony Dynamic Digital Sound), LPCM (Linear Pulse Code Modulation) and other.

	stream_id	sub_stream_id
MPEG Audio (base)	1100 0xxx	N/A
MPEG Audio (ext)	1101 0xxx	N/A
AC-3	1011 1101	1000 0xxx
DTS	1011 1101	1000 1xxx
SDDS	1011 1101	1001 0xxx
LPCM	1011 1101	1010 0xxx

Table 2

In a subsequent process step 210, the segments are arranged in data packs.

- 10 Data packs comprise data segments of one type of stream. This implies that a data pack may comprise data of multiple sub streams, although this is not the case in the preferred embodiment, as this is not allowed by the DVD standard. Optionally, data packs comprise a padding pack when not enough data of one stream is available to fill the 2 kB of the agreed data pack size. The packs are provided with a header for identification and to provide timing information for synchronising audio and video data.

15 In a subsequent process step 212, the data packs with the audiovisual data are put in sequence in one data stream. As prescribed by the DVD standard. These writing units are expensive commodities, so limiting the number used to one is important.

- 20 Process steps numbered 206 through 212 form a sub process 230 which is carried out by the multiplexer 104. As a person skilled in the art will appreciate, these process steps may also be carried out by separate components.

- After the packs have been put in one stream, they are encrypted by the encryption unit 105 in a process step 214. This encryption is done partly, so a playback apparatus is still able to read at least some data segment and data pack identification information of each pack. Preferably, the first 128 bytes of a data pack are not encrypted.

After the process step 214, data packs are obtained as depicted in Fig. 3. Fig. 3 shows a data pack 300, comprising a pack header 301, a data segment header 302 and a

payload 320. The pack header 301 comprises data for identifying the data pack, the data segment header 302 comprises an ID segment 312 identifying the type of data comprised by the payload 320 (as set out in Table 2). The scramble information is comprised by two bits in the scramble identification bits 314.

5 In a subsequent process step 216, the ID data segment of data segments comprising audio data is modified by the packet identifier unit 106. In this way, the audio packets are not recognised as such by a playback apparatus such as a legacy DVD player. This is done to prevent possible playback on a device that is not able to decrypt the packets. When a legacy DVD player, i.e. a DVD player not comprising an embodiment of the circuit  
10 of decryption according to the invention, would recognise an encrypted packet as comprising audio data, the legacy DVD player would try to playback the encrypted data. Although not intended, it is still possible that audio is played back. This is because not all audio data is encrypted; the first part of data packs stored on a DVD are in the clear and may comprise data which the DVD-player uses for synchronisation. Usually, this will result in a lot of noise  
15 that could damage audio equipment such a speakers and, when played back over headphones, harm the ears of a user wearing the headphones.

When no audio data is recognised because the proper stream\_id is not found, no audio will be played back and only decrypted video will be played back. This is not very interesting to watch, but does not harm the legacy DVD-player.

20 Inventors propose modification of the stream\_id and sub\_stream\_id values as shown in Table 3. As a person skilled in the art will appreciate, modifications of this scheme are possible; Table 3 merely provides an embodiment.

	original		modified	
	stream_id	sub_stream_id	stream_id	sub_stream_id
MPEG Audio (base)	1100 0 <del>xxxx</del>	N/A	1100 1 <del>xxxx</del>	N/A
MPEG Audio (ext)	1101 0 <del>xxxx</del>	N/A	1101 1 <del>xxxx</del>	N/A
AC-3	1011 1101	1000 0 <del>xxxx</del>	1011 1101	1100 0 <del>xxxx</del>
DTS	1011 1101	1000 1 <del>xxxx</del>	1011 1101	1100 1 <del>xxxx</del>
EDTSS	1011 1101	1001 0 <del>xxxx</del>	1011 1101	1101 0 <del>xxxx</del>
EDTSS	1011 1101	1000 0 <del>xxxx</del>	1011 1101	1111 0 <del>xxxx</del>

Table 3

For the private stream, also the stream\_id can be modified instead of the sub\_stream\_id. In Table 4, only stream\_ids are modified, not the sub\_stream\_ids. Video, audio and sub\_picture streams are now all hidden. An additional advantage of not including the sub\_stream\_ids is that it is not necessary to parse the stream to find the location of the stream ID, as it is always stored in the 18<sup>th</sup> byte of the pack.

	Stream_id	Modified stream_id	Comment
MPEG-audio base stream	1100 0xxx	1100 1xxx	Data mapped to valid MPEG audio streamnumber, not used by DVD (DVD streamnumber +8)
MEG-Audio ext stream	1101 0xxx	1101 1xxx	Data mapped to valid MPEG Audio streamnumber, not used by DVD (DVD stream number + 8)
Video stream	1110 0000	1110 1000	Data mapped to unused video stream number 8
Private stream 1 (used for AC-3, DTS, sub-picture, LPCM etc.)	1011 1101	1110 1111	Data mapped to unused video stream number 15

Table 4

Having modified the ID data of the audio stream of the data to store, the encrypted data packs are stored by the DVD recorder drive 107 in a process step 218.

After all data has been stored, the process ends in a terminator 220 of the flowchart 200.

It will be apparent to a person skilled in the art that altered ID data can also be added directly by the multiplexer 104, instead of by a separate unit. Also, the order of the encryption and altering the ID data can be swapped in a further embodiment.

Fig. 4 shows a DVD player 400 as an embodiment of the apparatus for rendering and retrieving audiovisual data according to the invention. The DVD player 400 comprises a DVD drive 401 as a storage device, a decryption unit 402, a de-multiplexer 403 and a video processor 404. The decryption unit 402 and the de-multiplexer 403 form a circuit 410 an embodiment of the circuit for decrypting data according to the invention. The video

processor 404 can be embodied as a MPEG decoder. The method of operation of the DVD player 400 will be elucidated by means of a flowchart 500 in Fig. 5 depicting a retrieval and rendering process as an embodiment of the method of retrieving and rendering data according to the invention.

Reference numeral:	Label of process step
502	Initiate playback
504	Retrieve data to play back
506	Decrypt packs
508	Identify proper streams
510	Build elementary streams
520	De-multiplexing packs
512	Render elementary streams
514	Reproduce rendered data
516	Selected data played back

Table 5

When playback of encrypted data stored on a DVD is requested in a process step 502, data is retrieved from the DVD by the DVD drive 401 in a subsequent process step 504. Next, the packs are decrypted by the decryption unit 402 in a process step 506. The de-multiplexer 403 is adapted to recognise modified ID data. This means that it is able to recognise data for the MPEG audio stream, even though the stream\_id is different from what has been defined by the DVD standard. Identification of the proper streams is done in a process step 508.

In a subsequent process step 510, the de-multiplexer forms elementary streams from the packets, delivering it to a video processor 404 for rendering to provide a signal that can be reproduced on a speaker 420 or a TV-set (not shown). The process step 508 and the process step 510 form a sub process 520 that in this embodiment is carried out by the de-multiplexer 403.

Next, the elementary streams are rendered for proper reproduction by a speaker and/or screen in a process step 512 by the video processor 404. Subsequently, the rendered data is reproduced by a speaker 420 and a screen (not shown) in a process step 514. The retrieval and rendering process depicted by the flowchart 500 ends in a terminator 516 where all data can be played back has been played back.

A computer program for implementing the steps of the method of the invention is stored on a computer-readable medium, such as a CD-ROM, DVD-ROM, or hard disk, and is executed by a computer system.

stream\_id. This may be applied to audio as well as video or both data types. Providing empty data streams does not mean that all data streams are empty indeed. For example, the minimum bitrate of an AC-3 stream is 64 kbps. A playback device as an embodiment of the apparatus for rendering and retrieving audiovisual data according to the invention will  
5 discard the empty stream or streams. The playback device will also recognise the modified stream\_ids and decrypt and playback the decrypted data.

Various other embodiments of the invention are possible without departing from the scope of the invention. For example, a function being described as being carried out by one element may also be carried out by multiple elements and vice versa.

10 Also, the data may be stored on a whole range of data carriers ranging from optical carriers in accordance with various standards as Compact Disc®, Super Audio Compact Disc®, BluRay® to solid state carriers like flash EEPROM circuits and even comprising digital video tape.

As a person skilled in the art, the invention may also be embodied as a  
15 computer programme product comprising computer readable instruction for programming a processing unit for executing the methods according to the invention, a data carrier carrying such computer programme product and a programmed computer enabled to execute one or more of the methods according to the invention.

In summary, the invention relates to the following:

20 Current legislation requires the possibility of encryption when storing television programmes received by broadcast. However, legacy playback apparatuses will not be able to play back such encrypted data in a regular way, but possibly in a wrong way. This may result in problems like damage of speakers. Therefore, the invention intends to hide any of such possibly damaging streams by intentionally providing such streams with a wrong  
25 identification during the encryption process. The invention provides among others a method and circuit for encryption and a method and circuit for decryption. The invention is especially suitable for DVD recorders, but may also be employed for other video and/or audio recorders. The invention may even be used for encrypting non-audiovisual data.





## CLAIMS:

1. Method (200) of encrypting a data stream comprising at least one stream of audiovisual data, comprising steps of:

(a) segmenting (206) the stream of audiovisual data in data segments (320);

(b) providing (216) the data segments with ID data in an ID segment (312), the ID data being different from ID data being pre-determined to identify the type of data in the stream of audiovisual data; and

(c) partly encrypting (214) the data segments, leaving the ID segment unencrypted.

2. Method according to claim 1, wherein the method further comprises the step of creating (210) data packs (300), each data pack comprising at least one data segment and wherein in the step of partly encrypting the data segments, the ID segment of at least one data segment is unencrypted.

3. Method according to claim 1, wherein the data stream comprises multiple streams of different types of audiovisual data and data segments of at least one stream of audiovisual data are encrypted.

4. Method according to claim 3, wherein data segments of at least one stream of audiovisual data is provided with ID segments comprising ID data being different from ID data being pre-determined to identify the type of data in the stream of audiovisual data.

5. Method according to claim 3, wherein the multiple streams of audiovisual data are provided simultaneously and the method further comprising the step of multiplexing (212, 230) the segments comprising data of the multiple streams of audiovisual data to a further data stream.

6. Method according to claim 1, wherein the data segments are provided (208) with further ID data in the ID segment, the further ID data being pre-determined to identify the type of data in the stream of audiovisual data and the further ID data being in a further

step (216) replaced by the ID data being different from ID data being pre-determined to identify the type of data in the stream of audiovisual data.

7. Method according to claim 2, wherein the data packs are MPEG-2 data stream  
5 packs.

8. Method according to claim 1, wherein the ID data being pre-determined to  
identify the type of data in the stream of audiovisual data is pre-determined by the DVD  
standard.

9. Method according to claim 1, further comprising the step of providing an  
empty stream of audiovisual data of the same type as the stream of audiovisual data for which  
non pre-determined ID data has been provided, the empty stream of audiovisual data being  
provided with ID data pre-determined for identifying that type of data.

10. Method (300) of storing a data stream comprising at least one stream of  
audiovisual data, comprising the step of receiving the data stream, the method as claimed in  
claim 1 and the step of storing the segmented and encrypted data on a storage medium.

11. Circuit (110) for encrypting a data stream comprising at least one stream of  
audiovisual data, comprising:

(a) a segmenting unit (104) for segmenting the stream of audiovisual data in data  
segments;

(b) a unit (106) for providing the data segment with ID data in an ID segment, the ID data  
being different from ID data being pre-determined to identify the type of data in the  
stream of audiovisual data; and

(c) an encryption unit (105) for partly encrypting the data segments, leaving the ID  
segment unencrypted.

12. Circuit according to claim 11, further comprising a packing unit (104) for  
creating data packs (300), each data pack comprising at least one data segment; and wherein  
in the step of partly encrypting the data segments, the ID segment of at least one data segment  
is unencrypted.

13. Apparatus for storing data, comprising:

- (a) a receiver (101) for receiving data;
- (b) the circuit according to claim 11; and
- (c) a storage device (107) for storing the encrypted data on a storage medium (107).

5

14. Method (500) of decrypting audiovisual data encrypted using to the method as claimed in claim 1, comprising the steps of:

- (a) decrypting (506) the partly encrypted data segments (320, 300);
- (b) recognising (508) that the data carried by the ID segment is different from ID data being pre-determined to identify the type of data in the stream of audiovisual data and recognising the actual type of data comprised by the data segments; and
- (c) forming (510) a stream of audiovisual data from the data segments.

10

15. Method (500) of retrieving an rendering data stored using the method as claimed in claim 10, comprising:

15

- (a) the step of retrieving (504) data stored on the storage medium;
- (b) the method as claimed in claim 14; and
- (c) the step of rendering the decrypted stream of audiovisual data.

20

16. Circuit (410) for decrypting audiovisual data encrypted by the circuit as claimed in claim 11, comprising:

- (a) A decryption unit (402) for decrypting the partly encrypted data segments;
- (b) An identification unit (403) for recognising that the data carried by the ID segment is different from ID data being pre-determined to identify the type of data in the stream of audiovisual data and recognising the actual type of data comprised by the data segments; and
- (c) A streaming unit (403) for forming a stream of audiovisual data from the data segments.

25

30 17. Apparatus for rendering and retrieving audiovisual data, comprising:

- (a) a storage device (401) for retrieving data from a storage medium;
- (b) the circuit according to claim 16; and
- (c) a circuit (404) for rendering the decrypted stream of audiovisual data.

18. Computer programme product comprising computer readable instruction for programming a processing unit for executing the method according to claim 1.

19. Data carrier carrying the computer programme product as claimed in claim 1.

20. Programmed computer enabled to execute the method according to claim 1.

21. Computer programme product comprising computer readable instruction for programming a processing unit for executing the method according to claim 14.

22. Data carrier carrying the computer programme product as claimed in claim 14.

23. Programmed computer enabled to execute the method according to claim 14.

24. Data carrier (107, 401) carrying data encrypted using the method according to claim 1.

25. Data carrier according to claim 24, wherein the data carrier is a DVD recordable disc.

26. Data carrier according to claim 24, wherein the data carrier is a DVD rewritable disc.

## ABSTRACT:

Current legislation requires the possibility of encryption when storing television programmes received by broadcast. However, legacy playback apparatuses will not be able to play back such encrypted data in a regular way, but possibly in a wrong way. This may result in problems like damage of speakers. Therefore, the invention intends to hide any  
5 of such possibly damaging streams by intentionally providing such streams with a wrong identification during the encryption process. The invention provides among others a method and circuit for encryption and a method and circuit for decryption. The invention is especially suitable for DVD recorders, but may also be employed for other video and/or audio recorders. The invention may even be used for encrypting non-audiovisual data.

10

Fig. 1



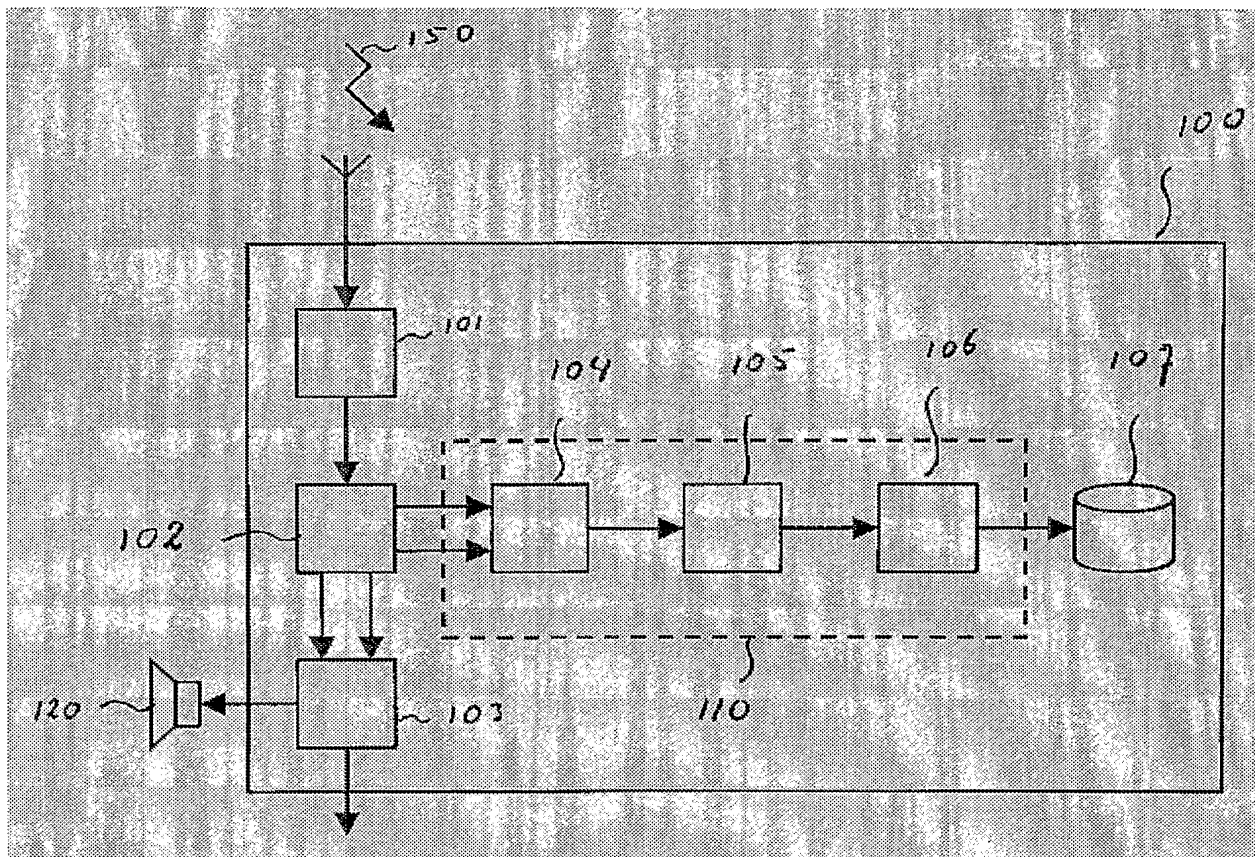


FIG.1

2/4

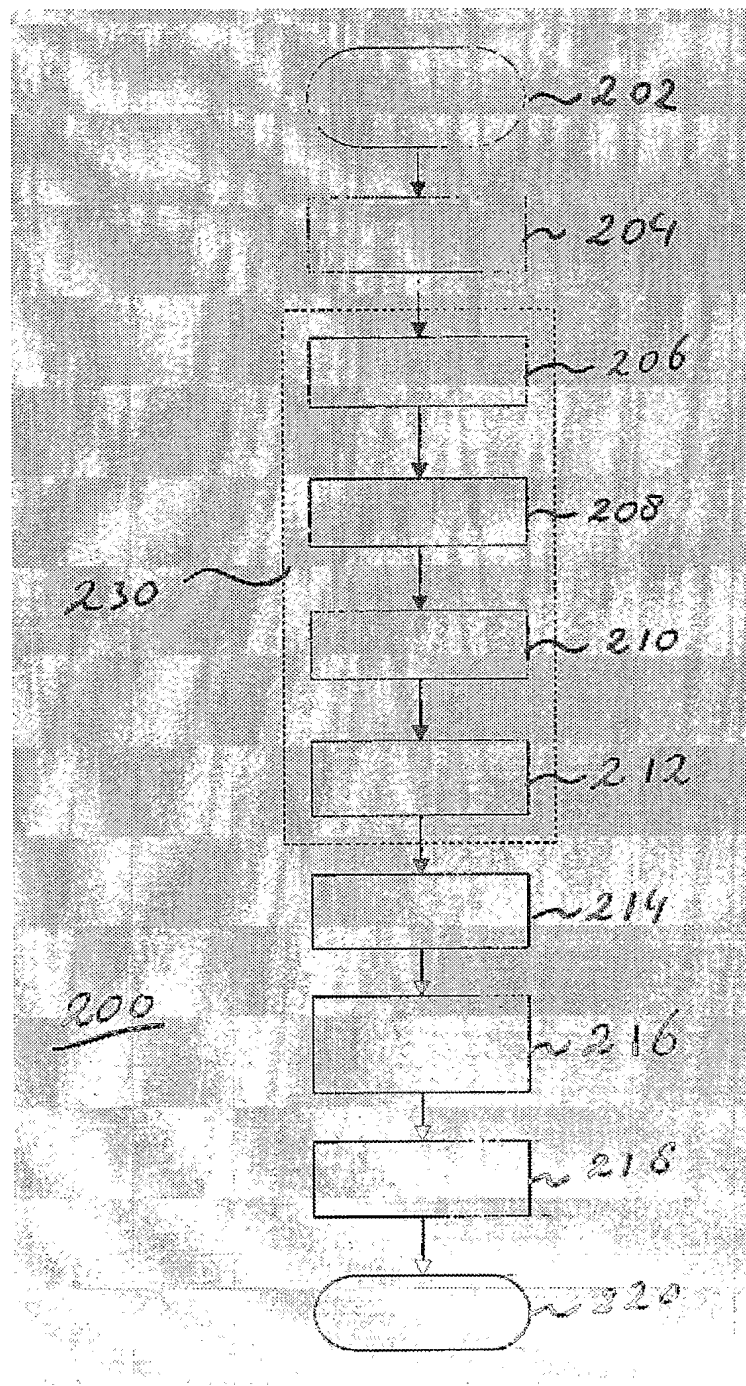


FIG. 2



3/4

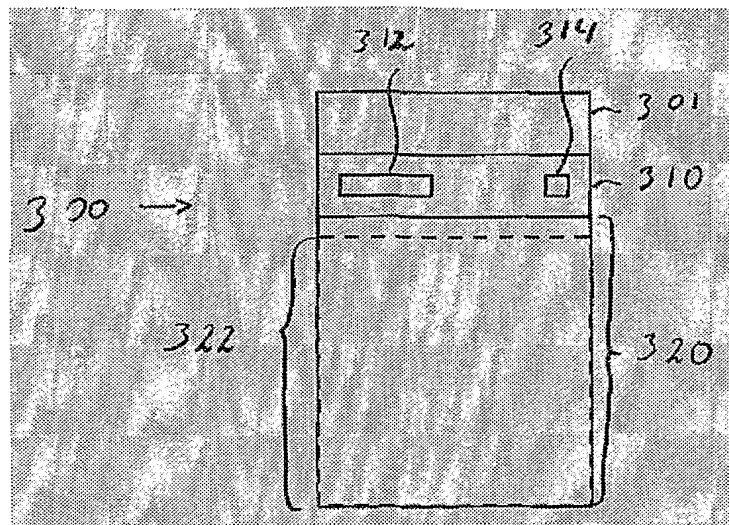


FIG. 3

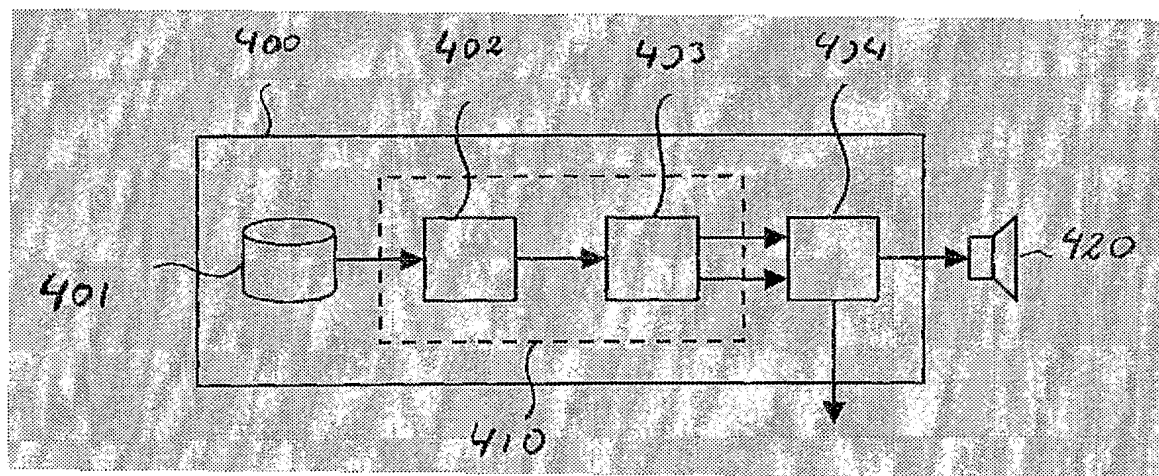


FIG. 4

4/4

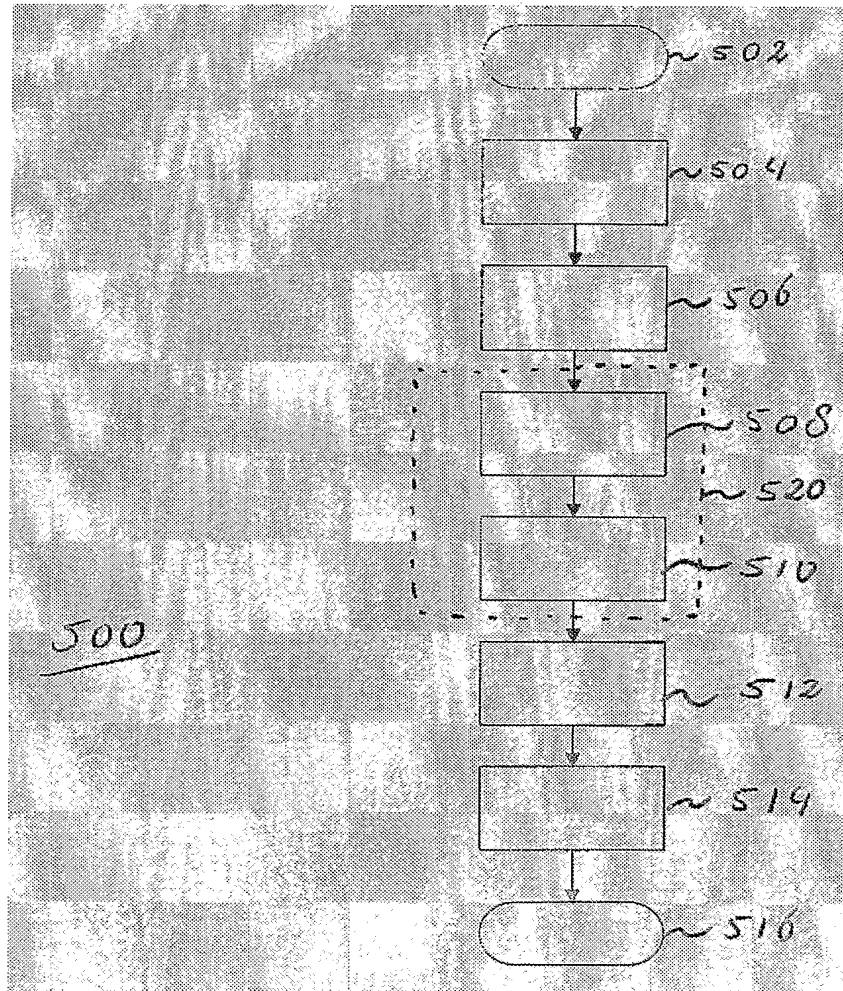


FIG.5



PCT/IB2005/050594

